
Cost Estimation

200-Bed Hospital Construction (as-planned schedule, calculated by Planora)

Planora calculates cost as **work hours × hourly rate** for each person on each task, then adds up tasks into phases and phases into the project.

₹37,86,000	4,768 h	₹8,100	₹794/h
total estimated cost	total work	average cost per working day	average blended rate

Cost by phase

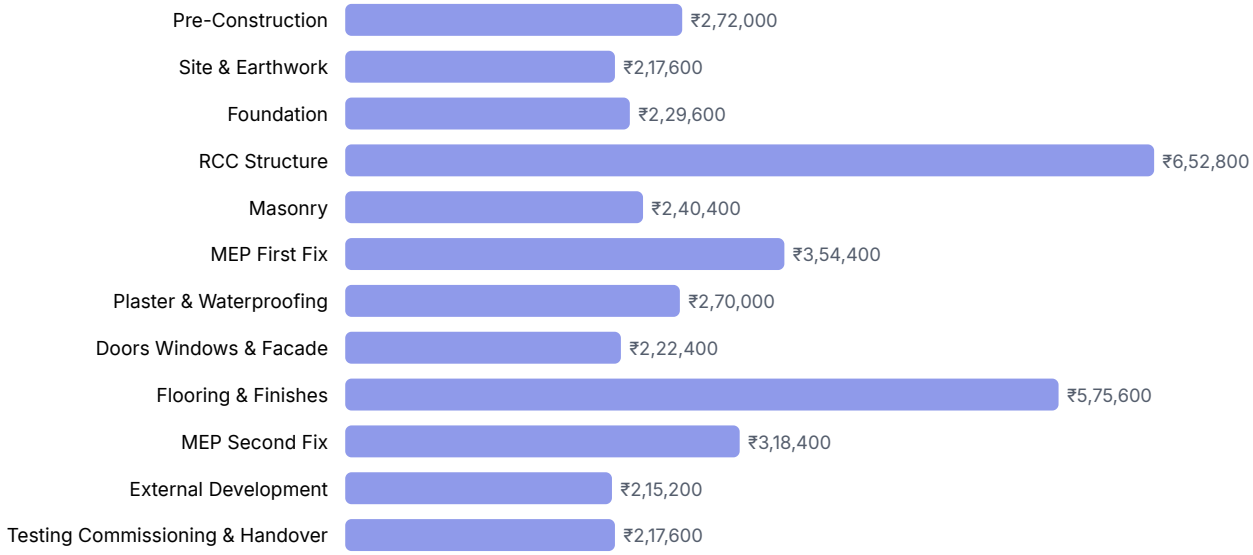

WBS	Phase	Duration	Work	Cost	Share
1	Pre-Construction	40 d	320 h	₹2,72,000	7.2%
2	Site & Earthwork	25 d	248 h	₹2,17,600	5.7%
3	Foundation	34 d	304 h	₹2,29,600	6.1%
4	RCC Structure	83 d	824 h	₹6,52,800	17.2%
5	Masonry	45 d	360 h	₹2,40,400	6.3%
6	MEP First Fix	35.1 d	376 h	₹3,54,400	9.4%
7	Plaster & Waterproofing	43 d	344 h	₹2,70,000	7.1%
8	Doors Windows & Facade	35 d	336 h	₹2,22,400	5.9%
9	Flooring & Finishes	72.1 d	672 h	₹5,75,600	15.2%
10	MEP Second Fix	51 d	408 h	₹3,18,400	8.4%
11	External Development	36 d	288 h	₹2,15,200	5.7%
12	Testing Commissioning & Handover	33.1 d	288 h	₹2,17,600	5.7%
	Total	**467 d**	**4,768 h**	**₹37,86,000**	**100%**

Cost by resource

Resource	Rate	Work	Cost	Share
Project Manager	₹1,500/h	544 h	₹8,16,000	21.6%
Civil Engineer	₹800/h	624 h	₹4,99,200	13.2%
Planning Engineer	₹900/h	528 h	₹4,75,200	12.6%
MEP Contractor	₹750/h	592 h	₹4,44,000	11.7%
Safety Officer	₹650/h	672 h	₹4,36,800	11.5%
QA/QC Engineer	₹700/h	616 h	₹4,31,200	11.4%
Site Supervisor	₹550/h	632 h	₹3,47,600	9.2%
Electrical Team	₹600/h	560 h	₹3,36,000	8.9%
Total		**4,768 h**	**₹37,86,000**	**100%**

Not assigned to any task in the file, so no cost: RCC Crew, Masonry Crew, Finishing Crew, Facade Contractor.

How the estimate is built

1. Each task's work = duration × working hours per day × resource units (one person full time on a 10-day task = 80 hours).
2. Each assignment's cost = work hours × the resource's standard rate (for example Project Manager at ₹1,500/h).
3. Task cost = sum of its assignments + any fixed cost; phase cost = sum of its tasks; project cost = sum of all phases.

Limits of this estimate

- It covers the **labour and supervision** recorded in the file only. Materials, equipment, crews (RCC Crew, Masonry Crew, Finishing Crew, Facade Contractor), overheads, taxes and contingency are not in the file. A full hospital budget would add these as material/cost resources or fixed costs in Planora.
- Rates are the standard rates in the file; no overtime or rate changes are applied.

Source. Hospital_Construction_Advanced.xml from the construction test pack, opened in Planora 1.1.0. Dates are the **as-planned** schedule (progress recorded in the file cleared), calculated by Planora on the file's calendar (Mon–Fri, 8:00–17:00). Two links in the file could not be imported (one to the project summary row, one to a missing task); Planora reports them as import notes. Amounts are in the file's currency units, shown as ₹.